


ALL GODWIN ROLLBACKS ARE FULLY ASSEMBLED AND FACTORY TESTED.

### STANDARD FEATURES

- Tilt and roll capacity . . . . . 18 tons
- Reservoir with return filter. . . . . 30 gal.
- Loading angle (approximate). . . . . 12°
- Direct mount pump. . . . . standard
- Rollers with bronze bushings. . . . . .6"
- Dual-illuminated controls. . . . . standard
- Tie downs, each side . . . . . 6
- Ramsey hydraulic winch planetary . . . 8,000 lb. std
- 4" cross sills on 12" centers. . . . . std
- Headboard . . . . . .48" std
- 3/16 floor smooth . . . . . std
- Federal 108 lights. . . . . std
- Subframe . . . . . full length
- Tool box with key. . . . . 18"x18"x48"
- Rear stabilizer . . . . . independent hydraulic
- Stabilizer cylinders. . . . . (2) 4"
- Lift cylinder . . . . . (2) 5"
- Rollback cylinder . . . . . .4"
- Options: Wood or diamond plate floor
- 15,000 or 20,000 lb winch
- Tow bar



BRONZE BUSHED ROLLERS FOR LONG LIFE AND RUGGED SERVICE.

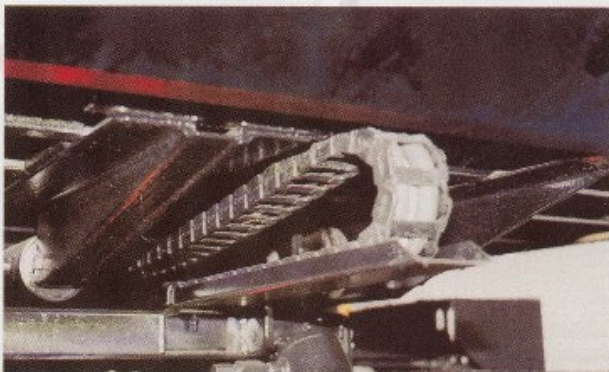

WINCH HOSES AND WIRES ARE ENCLOSED IN A TRACK FOR DURABILITY



INDEPENDENTLY OPERATED STABILIZER



**GODWIN MANUFACTURING COMPANY, INC.**

Highway 421 South • P.O. Box 1147 • Dunn, North Carolina 28335  
 (910) 892-0141 • Fax (910) 892-7402